WORLD Wheel combine harvester4LZ-8F		
MODEL		4LZ-8F
Type		Wheeled self-propelled full feed
Overall size	length（mm）	6100
	width（mm）	3200
	height（mm）	3350
Weight（kg）		4500
Engine	Model	YC4DK150-T301
	Type	Vertical, in-line, water-cooled, four stroke
	power（kW）	110.3
	Rated speed（r/min）	2600
	Fuel tank volume（L）	211
Gearbox type		HST+ mechanical gearbox
Cabin/Canopy		Luxury air-conditioned cab
Minimum turning radius（mm）		Left turn: 6500 right turn: 7500
Tire specification		Guide wheel: 10-15 drive wheel: 14.9-24
Gauge（mm）		Guide wheel: 1900 drive wheel: 1870
wheelbase（mm）		2960
Minimum ground clearance（mm）		350
Cutting width（mm）		2600/2750
Feeding capability（kg/s）		8
Header lifting mode		hydraulic
Threshing mode		Longitudinal axial flow rod tooth type
Threshing drum size（mm）		700*2520
Manipulation part		HST
Cleaning method		Reciprocating vibrating screen + centrifugal fan
Grain unloading mode		High level rotary unloading
Granary volume（m^3）		2.8
Hourly productivity（hm2/h）		0.2-1.1
Suitable for crops		Wheat, rice, corn, etc

Everything is subject to the physical object, subject to change without notice

沃得农机
WORLD GROUP



收获机械

WHEEL TYPE GRAIN COMBINE HARVESTER

轮式谷物联合收获机

WORLD

江苏沃得农业机械有限公司
地址：江苏省丹阳市丹北镇埤城西沟荡　邮编：212311
销售热线：0511-86341541
服务热线：0511-86342622
国际销售热线：0511-86349102
传真：0511-86348032　0511-86340900
网址：www.worldnyjx.com

致力于现代农业全程机械化
Committed to the full mechanization of modern agriculture

Efficient operation

The overall quality is 4.5t, the body is 6.1m, the turning radius is 6.0m, the steering is flexible and the operation efficiency is higher



Lightweight design, the whole machine is short and flexible

Strong power

Yuchai Co., Ltd. is equipped with 150 HP Guosan high pressure common rail engine to improve power. The harvesting speed reaches 8km / h, the walking speed is 30km / h, the fuel economy is good and the noise is low. Equipped with multi state switch, energy saving, fuel saving and green environmental protection.

Flexible turning

Equipped with 45 cc HST imported from Korea, it brings you a light and fast driving experience.








Cleaning expert

The advanced longitudinal axial flow threshing structure of Wade is adopted, and the drum length is 2.52 meters. The super long threshing drum can harvest high-yield crops freely.
The fish scale screen cleaning structure is adopted, and the cleaning area is increased by 15%, so as to ensure cleaner grain and less loss



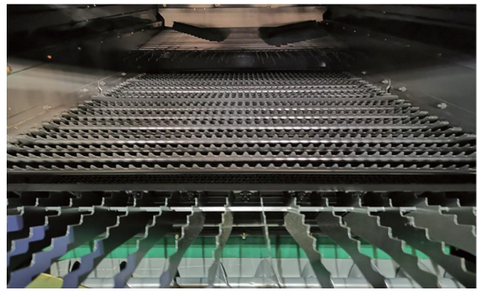

Luxury configuration

The luxurious air-conditioned cab has strong refrigeration and adjustable steering wheel, which can adapt to the driving environment of different drivers. The spacious driving environment is more comfortable and not easy to fatigue







Intelligent upgrade

1. Intelligent upgrade of driving computer, which can select a variety of vehicle driving modes to meet the habits of different drivers; 2. Forward and reverse fan control mode can be selected; 3. The electronic parking program is interlocked with the driving program, and can only walk after the electronic handbrake is released. .4.GPS positioning device is equipped as standard to facilitate cross regional operation and service positioning








Cooling upgrade

The radiator and shield adopt the latest design} 1. The heat dissipation area of the radiator is increased by 30%, and the external shield is increased to improve the sealing grade. 2. Double fan design is adopted to improve the heat exchange speed. 3. Upgrade the traditional water tank fan to a hydraulically driven forward and reverse rotation fan, automatically clean the accumulated dust on the water tank mesh cover, perfectly solve the problem of high temperature, and be equipped with manual forward and reverse rotation mode;

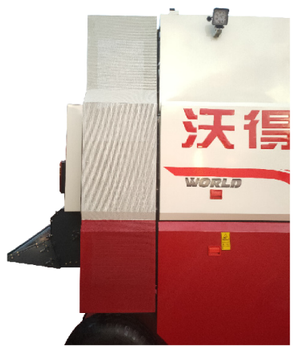





Unloading 360 °

1. Rotary lifting grain unloading is no longer limited by site and height, and the convenience is greatly improved. 2.2.8m ^{3} The side inclined horizontal granary optimizes the structure and unloading auger to improve the grain output speed. 3. The mobile grain unloading controller is adopted to make the operation more convenient





Capacity increase

2.8m ^{3} The large horizontal grain bin with side tilt is equipped with high-level rotating grain unloading cylinder to reduce the times of grain unloading and shorten the time of grain unloading The 211 liter large capacity reversible oil tank not only meets the user's long-time operation, but also facilitates maintenance





Header improvement smooth feeding

The header adopts 2750mm cutting width design (2600mm header is optional), and the size of structural square pipe is increased to improve the physical and mechanical properties of the header.
2. The conveying trough is widened by 80mm, and the square pipe material is upgraded from Q235 to 16Mn to improve the structural strength.





Multiple functions, higher income

One machine can be used for multiple purposes. It can also harvest wheat, rice, millet, sorghum, corn grains, soybeans and other different crops. The operation time is longer, the operation scope is wider and the income is more.

- 收小麦水稻
- 收玉米籽粒
- 收谷子高粱
- 收大豆







